

皮帶式轉彎輸送機

# TURNING BELT CONVEYORS



台灣製造  
MADE IN TAIWAN



**WEIPIN**

endless belt

WEIPINMECH INT'L CO., LTD.



**威品科技** 本公司位於台灣台中市神岡區，是一專業的皮帶式轉彎輸送機製造廠。擁有專業、經驗豐富的技術團隊與全套式的生產設備，採用一貫化、模組化的生產，產品結構穩定，運轉順暢，使用壽命長。除一般規格品外亦提供客制化設計與生產，多年來為各產業客戶提供最佳的輸送方案與高效率的產品輸送作業。

**Weipinmech** is located in Taichung city, Taiwan, we are the professional manufacturer of turning belt conveyors. Our company has professional, experienced technical team, and a full set of production equipment. The belt conveyors are manufactured in intergrated production line to assure structural stability, smooth running, and long service life. We produce not only standard products, but also provide customized specifications. For many years, we have provided the excellent handling solutions and efficient product delivery for various industries.



◀ **180° 轉彎輸送機**  
180° Turning Conveyor

**產業應用 Application**



送料機  
Feeder



塗裝線  
Painting Lines



食品業  
Food Industry



物流業  
Logistics Industry



包裝業  
Packaging Industry



紙類及印刷業  
Paper and Printing Industry




紡織業  
Textile Industry



電子業  
Electronics Industry



木工塗裝  
For application on woodworking painting lines.

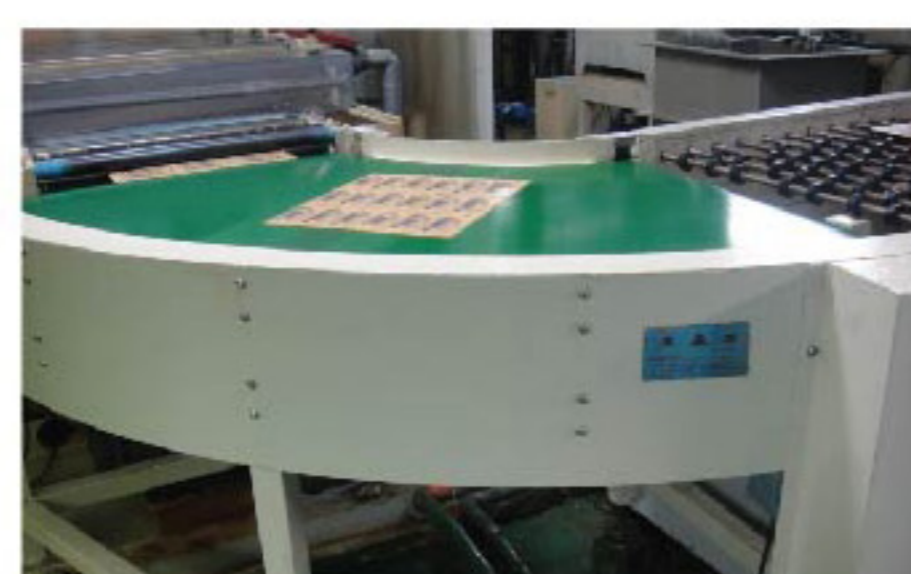

電子業製程  
For application on PCB product lines.



食品生產線  
For application on food production lines.



紙業生產線  
For application on paper production lines.



## 機台規格

- 轉彎角度：30°~180°
- 機台材質：SS41鐵材、SUS304不銹鋼、SS316頂級不銹鋼。
- 機台顏色：依客戶指定。
- 皮帶材質：PVC耐油防靜電材質、PU材質、白色食品級、止滑材質、其他特殊材質。
- 中心速度：最高速度100公尺/每分鐘，可依需要裝設調速裝置。
- 負載重量：依機種大小而定，最重可負載200KGS。

## Machinery Specification

- Degree of Curvature:  
30°~180°
- Machine Material:  
SS41 iron, SUS304 stainless steel, SS316 stainless steel.
- Color:  
Per customer's requirement.
- Belt Material:  
PVC anti-static and oil resistant material, PU material, white color food level, anti-slip material, and other special materials.
- Core Speed:  
Maximum speed 100 meters per minute. Extra speed adjustment options may be installed as required.
- Load Capacity:  
Maximum load 200 kgs, depending on size of machine.



## 內半徑與皮帶寬規格表 Table of Curve Dimensions

| 內半徑<br>Inside Radius (1R) | 皮帶寬<br>Belt Width (W) |     |     |     |     |     |     |      |      |      |
|---------------------------|-----------------------|-----|-----|-----|-----|-----|-----|------|------|------|
| 400                       | 200                   | 300 | 400 | 500 | 600 | 700 | 800 | 900  | 1000 |      |
| 600                       | 300                   | 400 | 500 | 600 | 700 | 800 | 900 | 1000 | 1100 | 1200 |
| 800                       | 300                   | 400 | 500 | 600 | 700 | 800 | 900 | 1000 | 1100 | 1200 |
| 1000                      | 300                   | 400 | 500 | 600 | 700 | 800 | 900 | 1000 | 1100 | 1200 |









迴轉角度 Angle(A) : 30°~180°

\*特殊規格：可依客戶需求設計製造。

\*Special specification: Offer customized production.

## 90° 轉彎輸送機 90° Turning Conveyor

## 輸送設備流程佈置範例 Various Conveyor Configurations

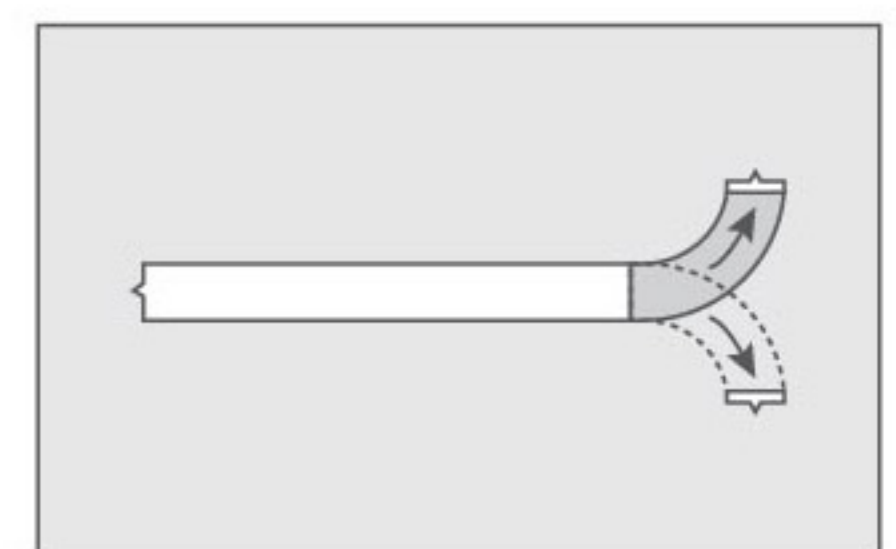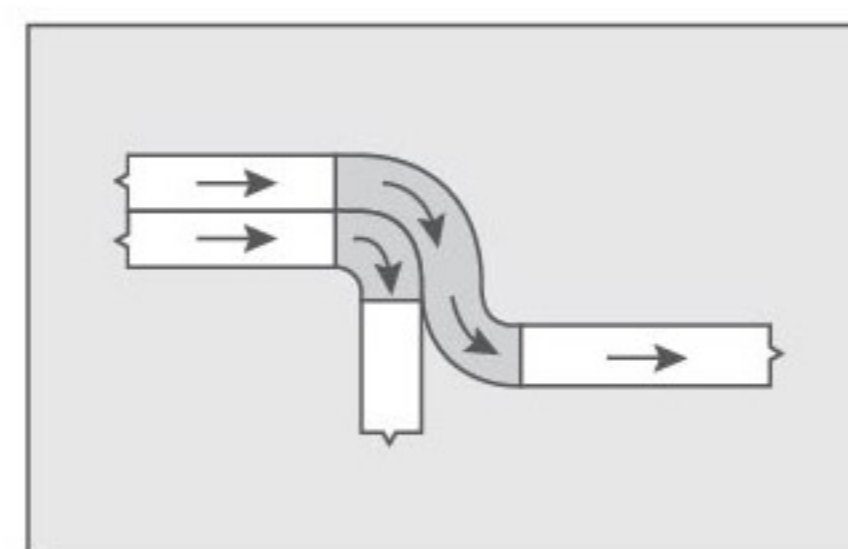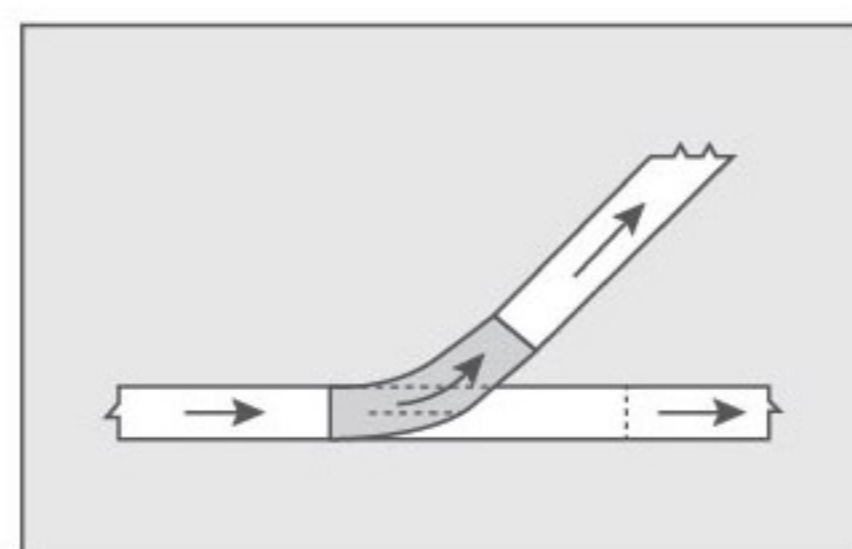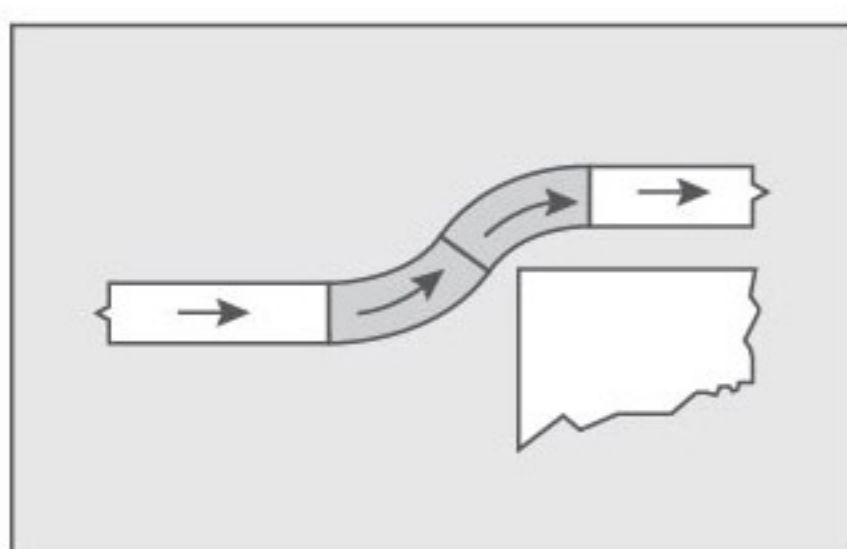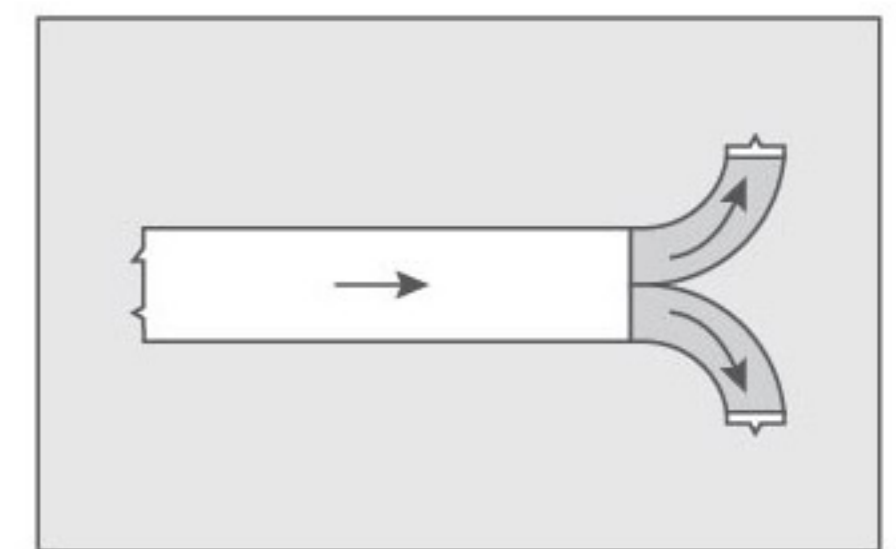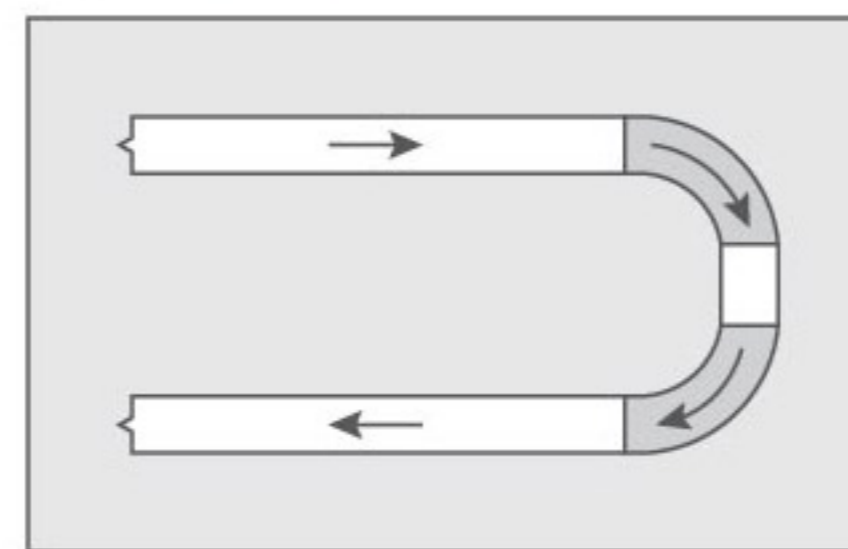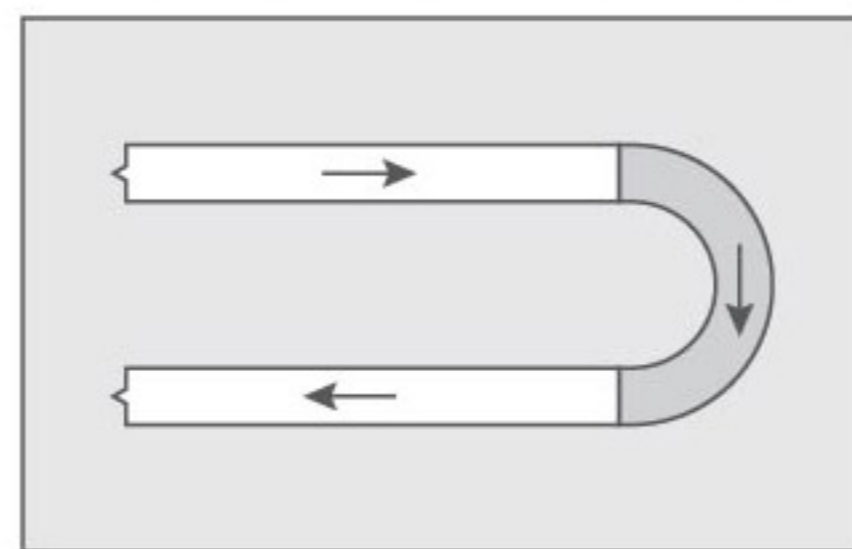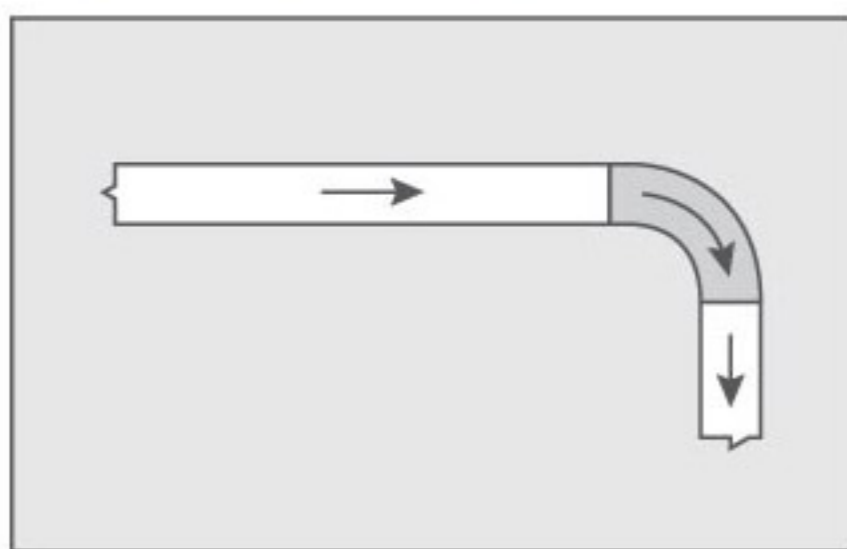



▶ 30° 轉彎輸送機  
30° Turning Conveyor



▶ 60° 轉彎輸送機  
60° Turning Conveyor



▶ 90° 轉彎輸送機  
90° Turning Conveyor



## 威品科技有限公司

WEIPINMECH INT'L CO., LTD.

42946 台灣台中市神岡區大富路88號

1F., NO.88, DAFU RD., SHEN KANG DIST., TAICHUNG CITY 42946, TAIWAN

TEL : 886-4-25123942 FAX : 886-4-25120828

E-Mail : weipin88@ms77.hinet.net